

SRS | STRATEGIC
ROBOTIC
SYSTEMS

FUSION

info@srsfusion.com | www.srsfusion.com | 619.335.5983



The FUSION is a fresh approach to providing a highly capable, multipurpose underwater vehicle with an intuitive user interface and control system. A unique system for a diverse range of demanding tasks.

ELEGANT DESIGN

Innovative technical solutions are integrated into the FUSION to maximize operational capability while minimizing maintenance. Through the use of advanced composite materials, streamlined mechanical integration, and bespoke sensors, the FUSION sets a new standard for underwater vehicles: Sophisticated, yet simple.

OPERATOR IN MIND

The FUSION embodies thousands of hours of field-tested wisdom. By focusing on the small details that matter most to operators, we've created a system that is remarkably intuitive to operate and practical to maintain, minimizing the learning curve and maximizing uptime.

AUTOMATED CONTROL & NAVIGATION


By capitalizing on a high-end sensor suite, our advanced automation and control system ushers in a new era of stability and ease of operation. The synergy of deep sensor integration, efficient mechanical design, and proprietary algorithms makes the FUSION a remarkably simple-to-operate yet robust underwater solution.

COMPLETE SYSTEM

Equipped with a suite of high-end sensors, the FUSION delivers unmatched capability in a single platform. Integrated imaging sensors provide constant visual feedback, while advanced navigation sensors drive sophisticated automation and control within its compact, highly efficient form factor.

Intuitive Operator Experience

Finally, an intuitive operator interface that consolidates all mission modes into a single, streamlined program. Running on a ruggedized platform, the FUSION makes mission planning, real-time data acquisition, and data exchange remarkably simple.

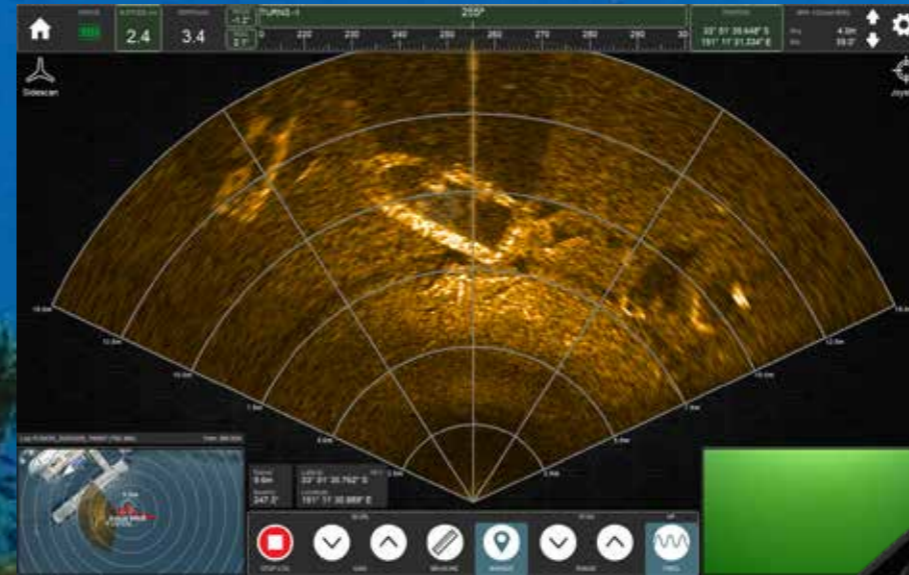

UNIVERSAL ACCESS, SEAMLESS SHARING

All collected data is accessible across every operational mode, ensuring continuity from mission start to finish. Easily export datasets for external analysis or share mission intelligence across other FUSION operations for a synchronized fleet.

PRECISION AT YOUR FINGERTIPS

Our intuitive Human-Machine Interface (HMI) is centered around a ruggedized touchscreen tablet. Engineered for the most demanding environments, it provides the flexibility of multiple control modes to ensure mission success in any condition.

A UNIFIED INTERFACE FOR TOTAL COMMAND

Experience an all-new approach to simplified operations, planning, and analysis. Built on a reliable, field-proven operating platform, SRS delivers full system interoperability within a single, intuitive interface.



NAVIGATION
Fully integrated navigation suite featuring DVL, GNSS, IMU, and USBL for high-precision positioning and autonomous control.

PROPULSION
Powerful, high-efficiency brushless DC thrusters featuring quick-release outrunner motors for maximum operational reliability.

POWER
High-density Li-Ion power modules: Engineered for rapid charging and extended mission endurance without compromising safety.

IMAGING
Comprehensive imaging suite: Ultra-HD 4K video, forward-looking multibeam sonar, and optional sidescan sonar for unmatched subsea visualization.


CONSTRUCTION
Advanced marine-rated materials engineered for maximum structural integrity, total corrosion resistance, and reduced maintenance cycles.

PAYLOAD BAY
Highly versatile modular payload bay: Featuring standardized mechanical and electrical interfaces for rapid, seamless sensor integration.



FUSION: The Ultimate Subsea Hybrid

The FUSION is the world's first Hybrid Underwater Vehicle, seamlessly uniting tethered ROV, untethered AUV, and diver propulsion/nav in a single platform. Built on a foundation of high-end sensors and intuitive autonomy, FUSION simplifies complex missions with a single user interface and a 100% battery-powered, expeditionary footprint. No generators, no redundant systems—just world-class capability in a class of its own.

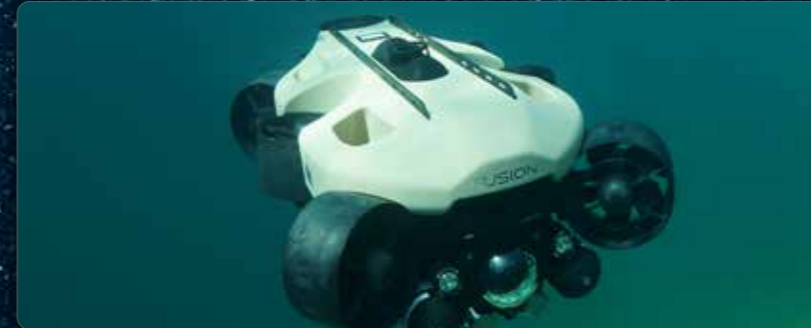

AUV
Autonomous Excellence: Fully programmable for complex maneuvering and high-fidelity data collection.



DCM
Diver Control Mode: Enhances safety by providing precision navigation and powered propulsion, ensuring divers stay strictly on course.



ROV
Precision Control: High-performance vectored thrusters with real-time sensor feedback and a fully automated control system.

FUSION Specifications

Whether you're looking to integrate a new asset into your fleet or need specific data to validate a mission profile, we're here to help. At Strategic Robotic Systems, we believe the best solutions come from direct collaboration. Reach out to our engineering team to discuss custom configurations, integrations, or to schedule a live demonstration of the FUSION system in action.

Depth rating:	305 m (1,000 ft)
Length:	686 mm (27 in)
Height:	275 mm (10.8 in)
Minimum pipe diameter:	508 mm (20 in)
Weight in air:	27.5 kg (60 lbs)
Thrusters:	4 vectored, 2 vertical, 1 pitch
Vector angles:	Horizontal - 35°, vertical - 10°
Motor type:	Brushless DC
Battery chemistry:	Lithium Ion
Available power:	914whr
Voltage:	23.5-29.05VDC
Endurance:	3-4+ hours (typical)
Charging time:	0-90% - 2 hours (pair)
Certification:	UN38.3
Tether diameter:	Fiber 2.4 mm (0.09 in) / Copper 3mm (0.12in)
Length:	500/1,000 m/2,000 m (1,640/3,280 ft/6,561 ft)
Strength:	113.4 kgf (250 lbf)
Type:	Single mode fiber, Gigabit, kink free, ruggedized Copper, ruggedized, strain relief bonded
Buoyancy:	Neutral in fresh water
HMI Configuration:	Rugged controller with touchscreen tablet
Operating system:	Windows 11
Control modes:	Normal, Control, Mission & Direct
Automation:	Auto depth, auto heading, auto altitude, waypoint navigation, path following, station hold, return to home
Aux Ports:	2 x Serial RS232/485, 1 x Ethernet 10/100

Camera:	UHD 4K, 135° tilt, 110° FOV in water
Lighting:	2 x LED, 1500 Lumen each
Forward Sonar:	Dual Frequency 750 kHz/1.2 MHz/3.0 MHz (optional) 130°/80° horizontal beam width 20°/12.5° vertical beam width 100 m/40 m (328 ft/115 ft) max range 0.1 m (4 in) min range 4 mm/2.5 mm (0.16/0.1in) range resolution 1°/0.6° acoustic angular resolution 15 Hz update rate 256 beams
USBL:	1 km (3,280 ft) hemispherical range 1° angular resolution ±50 mm (2 in) range resolution 24-32 kHz frequency
DVL:	1 MHz 50 m (164 ft) max range 0.2 m (0.65 ft) min range ±0.2% long range accuracy 0.01 mm/s velocity resolution ±16 m/s velocity range
GNSS (vehicle):	GPS/GLONASS 2.5 m (8.2 ft) accuracy
IMU:	0.1° pitch/roll accuracy 0.8° yaw accuracy
Options:	Dual function grabbers, Dual five function manipulators, 1.2/2.1 MHz forward sonar, sidescan sonar, AUV mode, USBL, Releasable Payload, Diver Module, Custom Payloads Available

