


# iBCN

- NOVATECH™ Iridium® beacons
- Superior lifetime
- Rugged and innovative design
- Iridium® and Bluetooth configuration



TRACKING & MONITORING

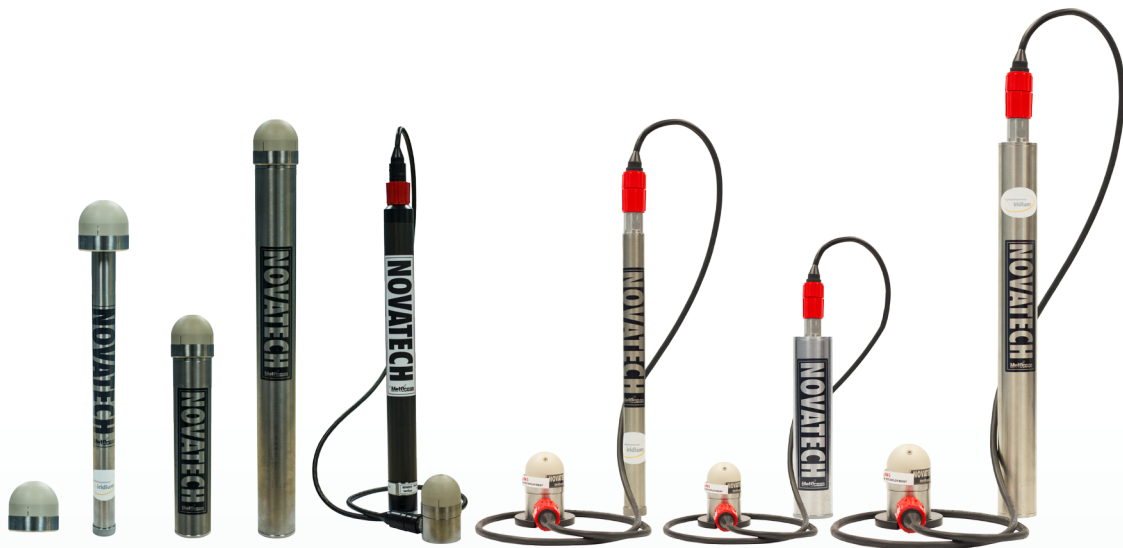

NOVATECH™ products have been proven throughout the world's oceans and trusted around the globe for over 40 years.

The iBCN is the next-generation of NOVATECH™ Iridium® beacons, designed for tracking and locating assets. Rated to 7,500 m (24,600 ft), the self-contained submersible beacons use the bi-directional capabilities of the Iridium® satellite telemetry system, allowing end users to receive near real-time GPS location of their asset.

Designed to meet unique deployment needs, the iBCN offers five battery housing options: self-contained, remote head, OEM, and extended battery life with the option of lithium or alkaline batteries. The NOVATECH™ Iridium® beacons provide peace of mind for those unpredictable deployments.

## TECHNICAL SPECIFICATIONS

### ELECTRONICS

- Iridium 9603 - Short Burst Data Transceiver
- GPS Telit SE880: Ultra-sensitive receiver, 48 Channel SiRFstarIV™

### PROGRAMMING INTERFACE

- Local Configuration  
Bluetooth SPP (Serial Port Profile) communication via Windows application
- Over-The-Air Configuration, Bi-directional Iridium SBD communication

### ENVIRONMENTAL

- Operating Temperature: -30°C to +70°C (-22°F to 158°F)
- Storage Temperature: -40°C to +85°C (-40°F to +185°F)
- Ocean Depth Rating: 7,500 m (24,600 ft)

### PHYSICAL

- Hull Material: Titanium (Grade 2)
- Cap Material: PEEK and Titanium (Grade 5)
- Color: Natural

Features	OEM	iBCN	iBCN-3	iBCN-7	iBCN-RH
Model N°	MMI-513-00000	MMI-513-12000	MMI-513-22000	MMI-513-32000	MMI-513-41100
Dimensions (Battery Hull)		13.15" x 1.13" (335 mm x 28.7 mm)	9.0" x 2.0" (228.6 mm x 50.8 mm)	18.56" x 2.0" (471.4 mm x 50.8 mm)	18.50" x 1.70 (470 mm x 43.0 mm)
Dimensions (Electronics Enclosure)	2.18" x 2.20" (55.4 mm x 58.9)	2.18" x 2.20" (55.4 mm x 58.9 mm)	2.18" x 2.20" (55.4 mm x 55.9 mm)	2.18" x 2.20" (55.4 mm x 55.9 mm)	6.0' (1.83 m) Remote head cable
Mass in air (with batteries)	0.22 lb (0.49 kg)	1.78 lb (0.81 kg)	3.30 lb (1.5 kg)	Alkaline 7.82 lb (3.55 kg) Lithium 7.05 lb (3.2 kg)	5.94 lb (2.7 kg)
Mass in water (with batteries)	0.24 lb (0.11 kg)	1.11 lb (0.50 kg)	2.0 lb (0.91 kg)	Alkaline 5.40 lb (2.45 kg) Lithium 4.62 lb (2.1 kg)	3.55 lb (1.61 kg)
Hull Material		Titanium (Grade 2)	Titanium (Grade 2)	Titanium (Grade 2)	Hard anodized aluminum
Cap Material		Titanium (Grade 5)	Titanium (Grade 5)	Titanium (Grade 5)	
Battery		9 x CR123A Lithium	3 x "D" cells Lithium	7 x "D" cells Alkaline or Lithium	6 x "C" cells Alkaline
On/Off Control		Magnetic reed switch	Magnetic reed switch	Magnetic reed switch	Magnetic reed switch & pressure switch
Activation		Surface sense (conductivity) GPS satellite check	Surface sense (conductivity) GPS satellite check	Surface sense (conductivity) GPS satellite check	Surface sense (conductivity) & pressure switch, GPS satellite check
Lifetime		2 years after being submerged for 1 year; 24 hour reporting once surfaced	7 years after being submerged for 1 year; 24 hours reporting once surfaced	Alkaline: 11 years after being submerged for 1 year; 24 hours reporting once surfaced. Lithium: 19 years	4 years after being submerged for 1 year; 24 hours reporting once surfaced
Options		Optional remote head configuration	Optional remote head configuration	Optional remote head configuration	Optional remote head configuration

### HEAD OFFICE

MetOcean Telematics  
21 Thornhill Drive  
Dartmouth, Nova Scotia  
Canada B3B 1R9  
sales@metocean.com

+1 902 468 2505

### UNITED STATES

MetOcean Telematics  
1750 Tysons Blvd  
Suite 1500, Office 1547  
McLean, VA 22102  
sales@metocean.com

+1 844 728 2868

### UNITED KINGDOM

MetOcean Telematics  
Hilldale Farm  
Titchfield Lane,  
Wickham, UK PO17 5NZ  
sales@metocean.com

+44 1489 888 555

### CANADA

MetOcean Telematics  
2 Gurdwara Rd Suite 608  
Ottawa, Ontario  
Canada K2E 1A2  
sales@metocean.com

+1 613 702 3196